

TSS BL3-D | DOOR

FEATURES

- ▶ Bullet resistant level 3 .44 magnum super power small arms protection
- ▶ Accepts various glazing materials from 3/4" thru 1 3/8"
- ▶ Anodized or painted finishes
- ▶ Full vision or vision/opaque glazing
- ▶ Stock or custom sizes
- ▶ Transom and sidelite options

PRODUCT DESCRIPTION

2 3/8" medium stile door system
 1 3/4" x 4" bullet resistant aluminum jamb

CONSTRUCTION


The TSS BL3-D is designed to meet Level 3 protection as tested in accordance with UL Standard 752 at Underwriters Laboratories. Door and frame components will be constructed from extruded aluminum in 6061-T6 alloy / temper. Corner joinery shall consist of extruded and keyed aluminum spline with continuous 3/8" diameter steel tie rod at door top and bottom rails. All joints and connections shall be tight, providing hairline joints and true alignment of adjacent members. Panels are not removable from the threat side.

SPECIFICATIONS

- ▶ This door and frame system is designed to provide protection in those areas where ballistic threat exists
- ▶ It is recommended that this door and frame system be used in conjunction with protected wall areas


MARKETS SERVED

- ▶ Gas stations
- ▶ Convenience stores
- ▶ Law enforcement facilities
- ▶ Public and private locations

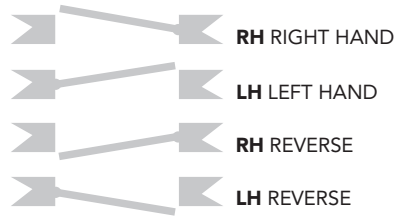

DOOR HARDWARE

- Standard Door Hardware: Continuous Hinge
 Push/Pull Handle
 Mortised Lock
 Overhead Surface Closer
- Optional Door Hardware: Electric Strike Release
 Exit Devices
 Custom Security Hardware

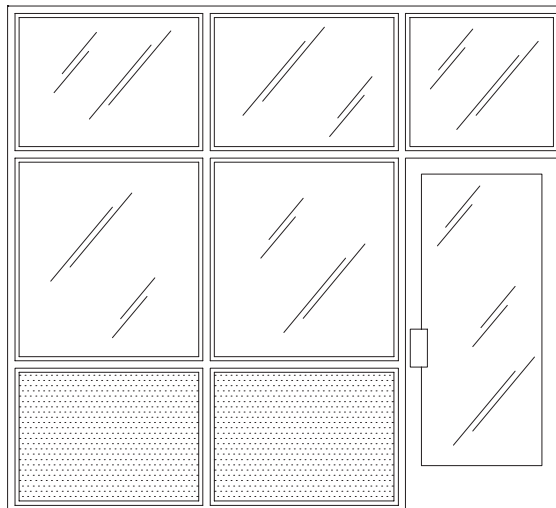

HANDLING INFORMATION

Handling: Care should be exercised during shipping and handling to maintain door appearance.

Storage: Store upright in a dry, well ventilated building or shelter at a constant temperature. Do not store in damp areas or freshly plastered buildings. Place unit on wood blocks at least 2" high to prevent moisture damage.

Application: Remove from protective container just prior to installation. Care should be exercised when installing door to insure that installation is level, plumb, square and secure.

Cleaning: You must clean the glazing unit during and after the construction period to maintain optimum performance and aesthetic properties. To clean, use a soft, clean cloth and a mild soap, detergent, or slightly acidic cleaning solution (such as vinegar). Wipe with a clean, lint-free cloth.

TECHNICAL SUPPORT

TSS maintains a full staff of professional and experienced sales representatives, project estimators, engineers, draftsmen, craftsmen and installers ready to assist in all phases of the bullet resistant project from initial design through installation. Consult our sales department or your local representative for assistance with all your bullet-resistant needs at 1.517.223.7807.

LIMITED WARRANTY

TSS offers a twelve month limited warranty. This warranty does not cover damage caused by neglect, abuse, vandalism, improper maintenance, accident or any other cause beyond the suppliers control not arising out of defects in material or workmanship. The warranties stated replace and exclude all other warranties. The warranty is limited to replacing products that fail to meet specification, or are defective in quality or workmanship at the time of delivery. TSS will not be responsible for (re)installation expenses or any direct or indirect loss(es) which may result from a defective product. TSS reserves the right to field inspect any product alleged to be defective. The buyer is responsible for any consequences resulting from product use.