

## TSS WC | DOOR

### FEATURES

- ▶ Levels 1 through 3 ballistic acrylic and fiberglass components
- ▶ Complete hardware provided
- ▶ Wide range of sizes available
- ▶ Plastic laminate or veneer finishes
- ▶ Frame shipped with door

### PRODUCT DESCRIPTION

The TSS WC Door is designed to defeat ballistic assaults from a 9mm medium power through .44 magnum superpower small arms handgun as tested in accordance with U.L. Standard 752 at Underwriter’s Laboratories.

### CONSTRUCTION

Glazing material consists of U.L. Listed Levels 1, 2 and 3 acrylic or super abrasion-resistant acrylic. Door frame has no exposed fasteners and is finished to match exterior. Door is to be constructed using a lumber core lined with a sheet of fiberglass. Exterior to be laminated or painted according to customer requirements. Frame to be 1 3/4" x 4" aluminum tube. Completely fabricated and shipped for field installation. All joint connections to have concealed clips to provide a rigid assembly when installed.

### SIZES

Door thickness: varies  
 Jamb tube dimension: 1 3/4" x 4"  
 Standard sizes: 36" x 84"

### DOOR HARDWARE

Standard will be:

- ▶ Heavy Duty Continuous Hinge
- ▶ Overhead Surface Closer
- ▶ Schlage Lever Lockset
- ▶ Anti-Jimmy Plate
- ▶ Two Piece Door Stops
- ▶ Electric Strike Release System

Please consult factory for additional hardware options.

### SPECIFICATIONS

#### A. FACTORY FINISH


A wide variety of plastic laminates, metal laminates, wood veneers, and prime paint finishes are available. Consult factory for details.

#### B. ALUMINUM FINISH OPTIONS

Standard hardware and frame finishes are dark bronze or clear anodized. Custom anodizing or baked enamel paint finishes are available.

### MARKETS SERVED

- ▶ Gas stations
- ▶ Convenience stores
- ▶ Banks
- ▶ Law enforcements facilities
- ▶ Any retail application

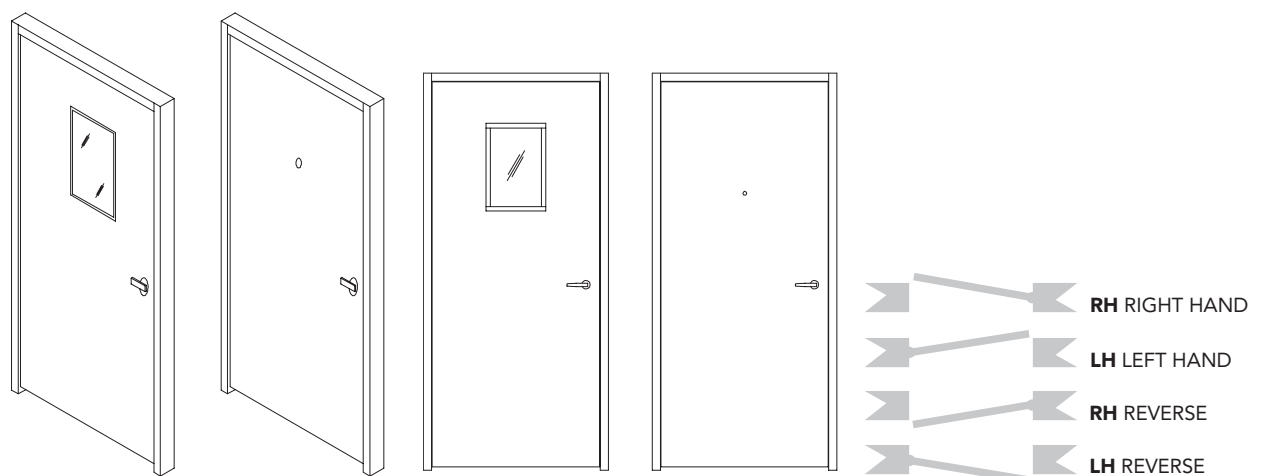

## HANDLING INFORMATION

**Handling:** Care should be exercised during shipping and handling to maintain door appearance.

**Storage:** Store upright in a dry, well ventilated building or shelter at a constant temperature. Do not store in damp areas or freshly plastered buildings. Place unit on wood blocks at least 2" high to prevent moisture damage.

**Application:** Remove from protective container just prior to installation. Care should be exercised when installing door to insure that installation is level, plumb, square and secure.

**Cleaning:** You must clean the glazing unit during and after the construction period to maintain optimum performance and aesthetic properties. To clean, use a soft, clean cloth and a mild soap, detergent, or slightly acidic cleaning solution (such as vinegar). Wipe with a clean, lint-free cloth.

## TECHNICAL SUPPORT

TSS maintains a full staff of professional and experienced sales representatives, project estimators, engineers, draftsmen, craftsmen and installers ready to assist in all phases of the bullet resistant project from initial design through installation. Consult our sales department or your

local representative for assistance with all your bullet-resistant needs at 1.517.223.7807.

## LIMITED WARRANTY

TSS offers a twelve month limited warranty. This warranty does not cover damage caused by neglect, abuse, vandalism, improper maintenance, accident or any other cause beyond the suppliers control not arising out of defects in material or workmanship. The warranties stated replace and exclude all other warranties. The warranty is limited to replacing products that fail to meet specification, or are defective in quality or workmanship at the time of delivery. TSS will not be responsible for (re)installation expenses or any direct or indirect loss(es) which may result from a defective product. TSS reserves the right to field inspect any product alleged to be defective. The buyer is responsible for any consequences resulting from product use.