


**GLAZING OPTIONS**

Glazing thicknesses from  $\frac{3}{4}$ " to  $1\frac{7}{16}$ "

**TSS VOICEPORT  
PRODUCT: MK-1 Voice Thru**

**PROPERTIES & SPECIFICATIONS**

Protection	9 mm   .357 Mag   .44 Mag
Ballistic Data	Max Velocity 1: ≤1350 ft/s Max Velocity 2: ≤1485 ft/s
Material #1	Cold worked austenitic stainless steel/plate
Material #2	Aluminum/alloy sheet/ plate
Part Diameter	6"
Mounting Hole Diameter	5"
Exterior/Interior Use	Both

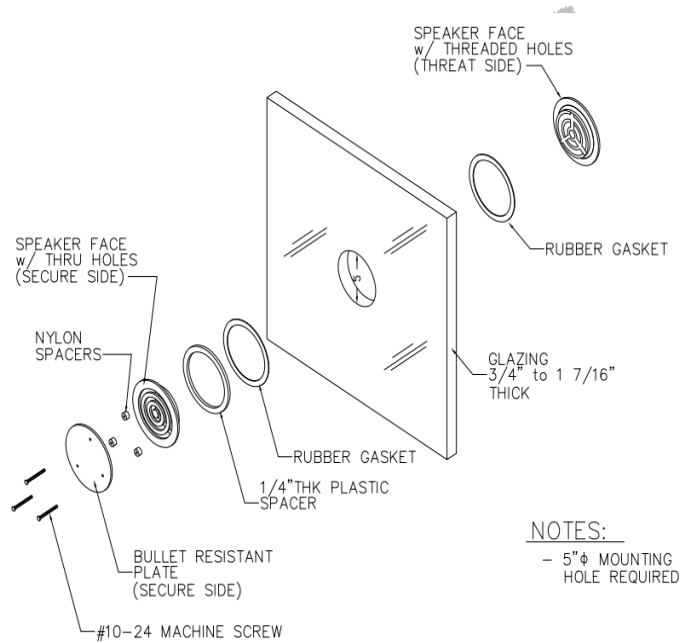

**NOTES:**  
- 5"  $\phi$  MOUNTING HOLE REQUIRED

**BALLISTIC RATING**

- U.L. 752 Level 1 – 9 mm (3 shot)
- U.L. 752 Level 2 – .357 Mag (3 shot)
- U.L. 752 Level 3 – .44 Mag (3 shot)

**LIMITED WARRANTY**

12-month limited warranty. Does not cover damage from neglect, abuse, vandalism, improper maintenance, or any other cause not arising out of defects in material or workmanship. The warranties stated replace and exclude all other warranties. The warranty is limited to replacing products that fail to meet specification, defective in quality, or workmanship at time of delivery. TSS is not responsible for (re)installation expenses or any direct or indirect loss or losses which may result from a defective product. TSS reserves the right to field inspect any product alleged to be defective. Buyer is responsible for any consequences from the product use.

**STANDARDS**

- ASTM A 666
- ASTM B 209/B 209M

**INSTALLATION**

Do not begin installation until substrates have been properly prepared. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

1. Clean surfaces thoroughly prior to installation.
2. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
3. Install in accordance with manufacturer's instructions.
4. Protect installed products until completion of project.
5. Touch-up, repair or replace damaged products before Substantial Completion.